


RF 3000...

3000 PSI / CODE 61

Flange dimensions  
法兰参数表

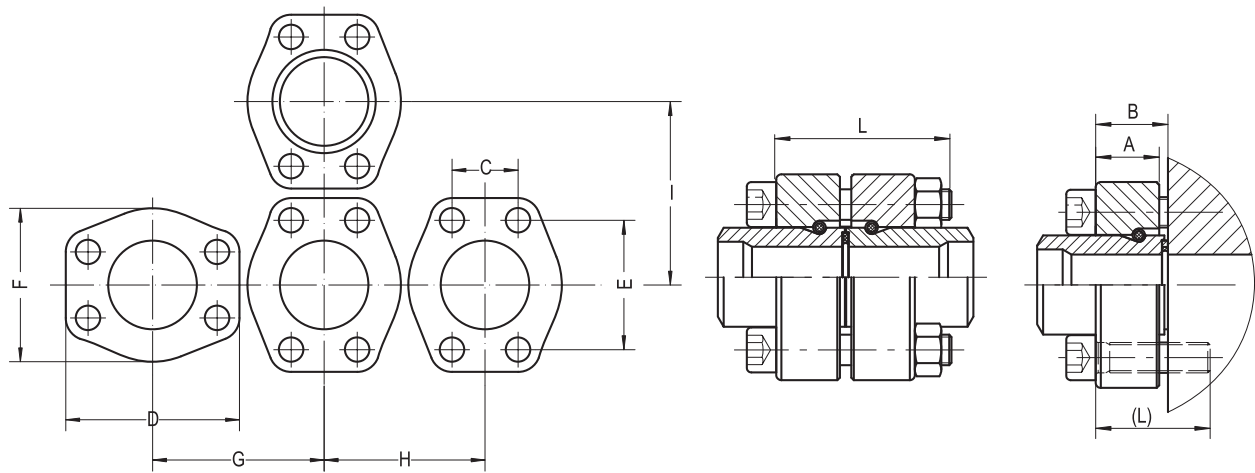


| Order Example 订货示例        |  |                        |                   |
|---------------------------|--|------------------------|-------------------|
| Material<br>材质            |  | Example<br>示例          | Order Code<br>订货号 |
| Steel , zinc plated 碳钢，镀锌 |  | RF 3000-1/2            | 2.16.01.0001      |
| 1.4404 不锈钢 316L           |  | RF 3000-1/2- <i>SU</i> | 2.16.03.0001      |

| W.P.<br>bar<br>工作压力 | Size<br>Inch<br>规格 | Flange<br>Type<br>法兰型号 | Order Code<br>订货号 | A    | B    | C    | D     | E     | F     | G     | H     | L     | Bolt<br>L (L)<br>螺栓 |
|---------------------|--------------------|------------------------|-------------------|------|------|------|-------|-------|-------|-------|-------|-------|---------------------|
| 350                 | 1/2                | RF 3000-1/2            | 2.16.01.0001      | 20.0 | 23.0 | 17.5 | 54.0  | 38.1  | 46.0  | 52.0  | 49.0  | 56.0  | M8x60(35)           |
|                     | 3/4                | RF 3000-3/4            | 2.16.01.0002      | 20.0 | 23.0 | 22.2 | 65.0  | 47.6  | 52.0  | 61.0  | 55.0  | 68.0  | M10x60(35)          |
|                     | 1                  | RF 3000-1              | 2.16.01.0003      | 24.0 | 27.0 | 26.2 | 70.5  | 52.4  | 59.0  | 67.0  | 61.0  | 72.0  | M10x70(40)          |
| 280                 | 1 1/4              | RF 3000-1 1/4          | 2.16.01.0004      | 22.0 | 25.0 | 30.2 | 80.5  | 58.7  | 73.0  | 78.0  | 75.0  | 82.0  | M10x70(40)          |
|                     | 1 1/2              | RF 3000-1 1/2          | 2.16.01.0005      | 25.0 | 28.0 | 35.7 | 94.5  | 69.9  | 83.0  | 90.0  | 85.0  | 96.0  | M12x80(45)          |
|                     | 2                  | RF 3000-2              | 2.16.01.0006      | 33.0 | 35.0 | 42.9 | 101.5 | 77.8  | 97.0  | 102.0 | 99.0  | 104.0 | M12x90(50)          |
| 210                 | 2 1/2              | RF 3000-2 1/2          | 2.16.01.0007      | 44.0 | 47.0 | 50.8 | 115.5 | 88.9  | 109.0 | 114.0 | 111.0 | 117.0 | M12x110(60)         |
|                     | 3                  | RF 3000-3              | 2.16.01.0008      | 50.0 | 55.0 | 61.9 | 135.0 | 106.4 | 132.0 | 136.0 | 133.0 | 137.0 | M16x130(80)         |
| 50                  | 4                  | RF 3000-4              | 2.16.01.0009      | 35.0 | 38.0 | 77.8 | 162.0 | 130.2 | 152.0 | 160.0 | 155.0 | 164.0 | M16x100(55)         |
|                     | 5                  | RF 3000-5              | 2.16.01.0010      | 45.0 | 48.0 | 92.1 | 184.0 | 152.4 | 181.0 | 185.0 | 183.0 | 186.0 | M16x120(65)         |

RF 6000...

6000 PSI / CODE 62

Flange dimensions  
法兰参数表

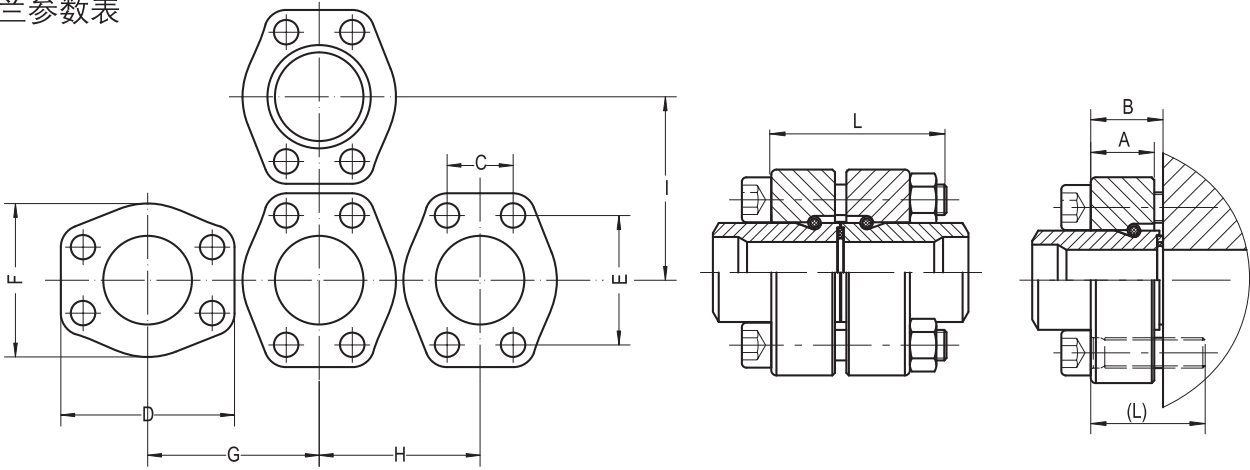

C

| Order Example 订货示例        |  |                 |                |
|---------------------------|--|-----------------|----------------|
| Material 材质               |  | Example 示例      | Order Code 订货号 |
| Steel , zinc plated 碳钢，镀锌 |  | RF 6000-1/2     | 2.16.01.0367   |
| 1.4404 不锈钢 316L           |  | RF 6000-1/2 -SU | 2.16.03.0367   |

| W.P.<br>bar<br>工作压力 | Size<br>Inch<br>规格 | Flange<br>Type<br>法兰型号 | Order Code<br>订货号 | A    | B    | C    | D     | E    | F     | G     | H     | L     | Bolt<br>L(L)<br>螺栓 |
|---------------------|--------------------|------------------------|-------------------|------|------|------|-------|------|-------|-------|-------|-------|--------------------|
| 420                 | 1/2                | RF 6000-1/2            | 2.16.01.0367      | 20.0 | 23.0 | 18.2 | 54.0  | 40.5 | 46.0  | 56.0  | 53.0  | 59.0  | M8x60(35)          |
|                     | 3/4                | RF 6000-3/4            | 2.16.01.0368      | 20.0 | 25.0 | 23.8 | 65.0  | 50.8 | 52.0  | 70.0  | 66.0  | 75.0  | M10x70(40)         |
|                     | 1                  | RF 6000-1              | 2.16.01.0369      | 24.0 | 27.0 | 27.8 | 81.0  | 57.2 | 70.0  | 80.0  | 75.0  | 84.0  | M12x70(40)         |
|                     | 1 1/4              | RF 6000-1 1/4          | 2.16.01.0370      | 30.0 | 33.0 | 31.8 | 95.5  | 66.6 | 78.0  | 90.0  | 83.0  | 99.0  | M14x90(50)         |
|                     | 1 1/2              | RF 6000-1 1/2          | 2.16.01.0371      | 35.0 | 39.0 | 36.5 | 112.0 | 79.3 | 95.0  | 108.0 | 101.0 | 116.0 | M16x100(60)        |
|                     | 2                  | RF 6000-2              | 2.16.01.0372      | 40.0 | 43.0 | 44.5 | 133.5 | 96.8 | 114.0 | 128.0 | 120.0 | 137.0 | M20x110(65)        |